DL ÉQUIPEMENT
built for safety

ISOWARM
QUALITY PROTECTION FOR HOT WORK

Proban Towel


Glass Industry - Industrial Maintenance

REF: DLS20/101/XX
Size: various dimensions

VERSION 10/2026

This PPE complies with Regulation (EU) 2016/425 and has been granted EU type-examination certificate no. CER26/04/0052.C1 issued by TTS- Total Testing Services srl, European notified body 2959.
This PPE is verified by the MODULE D audit carried out by Quintin Certifications, European notified body 2927. EU Declaration of Conformity: available for download on our website: www.dl-equipement.fr

CE

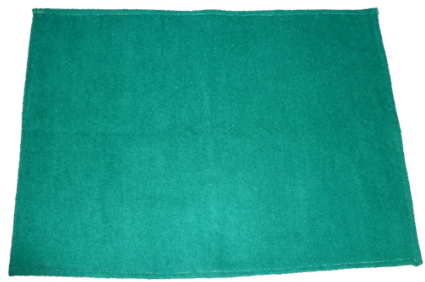

Instructions and precautions for use:
The Proban towel, made of 100% cotton treated with Proban, is intended for use in moderately hot conditions.
Before each use of the towel, make sure that it shows neither tears nor stains, as such damage could impair its protective effectiveness.
This accessory must always be used in combination with the Proban marine DLM30/1XX/XX, the DLP10/412/XX trousers and our Proban balaclava DLCAG-PROBAN in order to ensure optimum protection of the body.
The towel must always be accompanied by garments offering at least the same performance according to EN ISO 11612 (A1 B2 C2 F2).

Protection limits:
The protection is identical over the entire surface of the garment.
This towel is not suitable for work areas where there is a risk of molten material splashes; in that case it is essential to use a garment made of aluminised fabric in order to ensure protection suited to the risks.
In the event of an accidental splash of a chemical or flammable liquid, the wearer must remove the towel and make sure that the liquids have not come into contact with the skin. The towel must then be cleaned or withdrawn from service.
Warning: In the event of a splash or spatter of molten metal, the user must leave the work area immediately and remove the garment concerned. Caution: if the garment is worn directly against the skin, it may not entirely eliminate the risk of burns.

Packaging & storage:
Item delivered in a shipping carton without other packaging (no specific packaging required). Recommended storage in a dry & clean place, away from light, in order to maintain the level of protection corresponding to the tests carried out.

Made in France

Care, cleaning:
Domestic washing according to ISO 6330, 5 washing cycles; the washing temperature must not exceed 40°C.
Do not use bleach - Do not tumble dry - Do not iron - Do not dry clean
DL Equipement SARL is the only company authorised to repair the Proban towels dls20/101/xx, in order to guarantee the use of the materials certified in the conformity file.
If the garment has hook-and-loop fasteners, make sure they are fully closed before washing. Preferably place the garment in a laundry bag. Do not use any cleaning products.

Recycling & disposal: To our knowledge, the materials used to manufacture this item present no particular hazard. Disposal or recycling of this garment can therefore be carried out in accordance with good practice and local regulations.

Annex II of Regulation (EU) 2016/425 (§1.1.2, §1.2, §1.3.2, §1.4, §2.4, §2.12, §2.14 and §3.6)
EN ISO 11612:2015 (mechanical requirements §6.5)

EN ISO 11612

A1 B2 C2 F2

A1 - Limited flame spread (surface ignition) §6.2 and §6.3
B2 - Convective heat (Level 1 to 3) §7.2
C2 - Radiant heat (Level 1 to 4) §7.3
F2 - Contact heat (Level 1 to 3) §7.6

Date of manufacture: on label (YEAR_MONTH_XXXX.(XXXX=traceability tracking)

Use-by limit: do not exceed 10 years.
/!\ Provided that the instructions for use and storage are followed.

Click here to learn more about the standards

DL Équipement 25 Rue Jean Baptiste Colbert Chambry - FRANCE · Tel.: +33 (0)3 23 52 18 38 · Email: contact@dl-equipement.fr
SARL with a share capital of €8,000 · SIRET: 490 725 355 00039 · Intra-community VAT: FR 93 490 725 355 · NAF 3299Z · www.dl-equipement.fr